



AB-GTM12DT-230VI

Job Name: _____

Location: _____

Engineer: _____

Submitted to: _____

Submitted by: _____

Reference: _____


Date: _____

Approval: _____

Construction: _____

Unit #: _____

Drawing #: _____

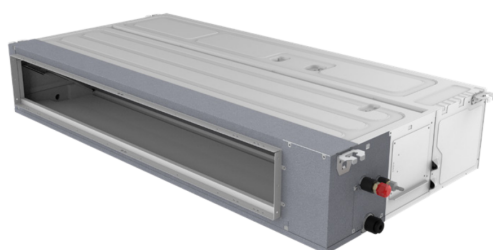

KEY FEATURES:

- Inverter technology
- Multi-speed capability
- BlueFin coating protection
- Built-in Smart Sync technology



SPECIFICATIONS:

Indoor Model			AB-GTM12DT-230VI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	12,000
Heating	Rated Capacity	Btu/h	12,000
Minimum Circuit Ampacity (MCA)		A	
Max. Fuse		A	5
Indoor Air Flow (Hi/Mi/Lo)		CFM	353
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	32/31/29
External static pressure (SlimDuct/AHU only)		in. WG	0.1
Drainage water pipe diameter		inch	1"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	1/4"/3/8"
Dehumidification		Pnt/H	2.11
Communication wiring			AWG 16-4
Indoor	Dimension (W×D×H)	Inch	27.56×17.72×7.8
	Packing (W×D×H)	Inch	34.25×21.3×10.24
	Net/Gross Weight	lbs.	27.6/33.1



AB-GTM12DT-230VI

