



AB-GTM24DT-230VI

Job Name: _____

Location: _____

Engineer: _____

Submitted to: _____

Submitted by: _____

Reference: _____


Date: _____

Approval: _____

Construction: _____

Unit #: _____

Drawing #: _____

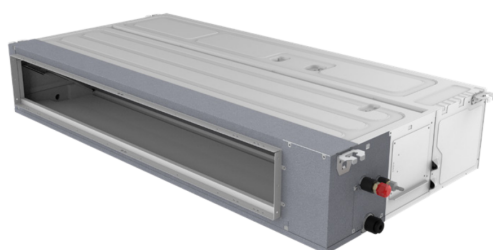

KEY FEATURES:

- Inverter technology
- Multi-speed capability
- BlueFin coating protection
- Built-in Smart Sync technology



SPECIFICATIONS:

Indoor Model			AB-GTM24DT-230VI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	24,000
Heating	Rated Capacity	Btu/h	24,600
Minimum Circuit Ampacity (MCA)		A	
Max. Fuse		A	5
Indoor Air Flow (Hi/Mi/Lo)		CFM	795
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	42/40/37
External static pressure (SlimDuct/AHU only)		in. WG	0.1
Drainage water pipe diameter		inch	1"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	1/4"/5/8"
Dehumidification		Pnt/H	5.43
Communication wiring			AWG 16-4
Indoor	Dimension (W×D×H)	Inch	39.37×27.56×9.65
	Packing (W×D×H)	Inch	48.43×32.68×11.81
	Net/Gross Weight	lbs.	59.5/70.5



AB-GTM24DT-230VI

