



**AB-SD36HI-230VO**

**Job Name:** \_\_\_\_\_

**Location:** \_\_\_\_\_

**Engineer:** \_\_\_\_\_

**Submitted to:** \_\_\_\_\_

**Submitted by:** \_\_\_\_\_

**Reference:** \_\_\_\_\_

**Date:** \_\_\_\_\_

**Approval:** \_\_\_\_\_

**Construction:** \_\_\_\_\_

**Unit #:** \_\_\_\_\_

**Drawing #:** \_\_\_\_\_

**KEY FEATURES:**

- High-efficiency Inverter Technology for consistent comfort and energy savings
- Uses environmentally friendly R32 refrigerant for improved performance
- AHRI and ETL listed
- GoldFin, delivering superior corrosion resistance and ensuring dependable long-term performance
- Compatible with 3rd party 24V Wall Thermostat
- Cross compatible with any 3rd party 24V AHU

NOTES:

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_







# AB-SD36HI-230VO

Outdoor Model		AB-SD36HI-230VO	
Power supply		V, Ph, Hz	208-230, 1PH, 60HZ
Min. circuit ampacity		A	25
Max. fuse		A	30
Compressor	Model		KTM240D57UMT
	Type		TWIN-ROTARY
	Brand		GMCC
	Capacity	Btu/h	26,323
	Input	w	2,085
	Rated current (RLA)	A	2.50
	Refrigerant oil	oz	VG74 22.6
Outdoor fan motor	Qty		1
	Input	w	150
	RLA	A	2.50
	Speed	r/min	860
Outdoor air flow (Max)		CFM	2,650
Outdoor noise level (Max)		dB(A)	56
Throttle type	Capillary		
Outdoor unit	Dimensions (WxDxH)	inch	37-63/64x31-57/64x15-3/4
	Packing (WxDxH)	inch	42-1/8x34-41/64x20-43/64
	Net/Gross weight	inch	132/140
Refrigerant	Type		R32
	Precharge	ft	24.6
Additional charge for 1/4 inch liquid pipe		oz	
Additional charge for 3/8 inch liquid pipe		oz	0.52 oz/ft
Refrigerant piping	Liquid side/Gas side	inch	3/8" 3/4"
	Max. pipe length	ft	246
	Max. difference in level	ft	98.4
Ambient temperature	Cooling	F	23~125
	Heating	F	-4~86



Outdoor Unit Dimension

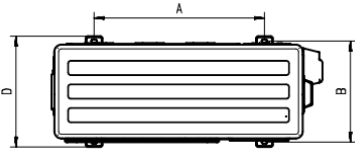

Dimensions		Model		18K/24K		30K/36K/48K/60K	
		inch	mm	inch	mm		
W	Model width	915	36-1/32	965	37-63/64		
H	Model height	650	25-19/32	810	31-57/64		
A	Distance between left and right foot bolts	605	23-13/16	635	25		
B	Distance between front and rear foot bolts	357	14-1/16	405	15-15/16		
D	Model depth	392	15-7/16	448	17-41/64		

Installation Instruction For Outdoor Unit

